
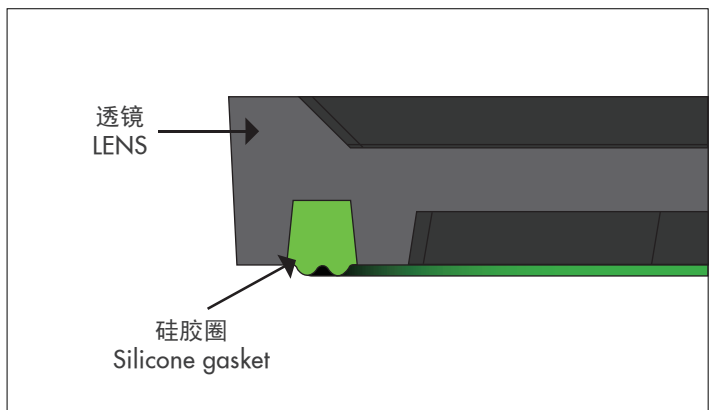


规格/TECHNICAL SPECIFICATIONS


型号/MODEL NUMBER:	I LENS796-R17371-10-12H1-NH-S
透镜尺寸/LENS DIMENSIONS:	173.0*71.4*10.1MM
定位方式/FASTENING:	锁螺丝、定位柱/Screw or Pin
是否符合ROHS/ROHS COMPLIANT:	是/YES

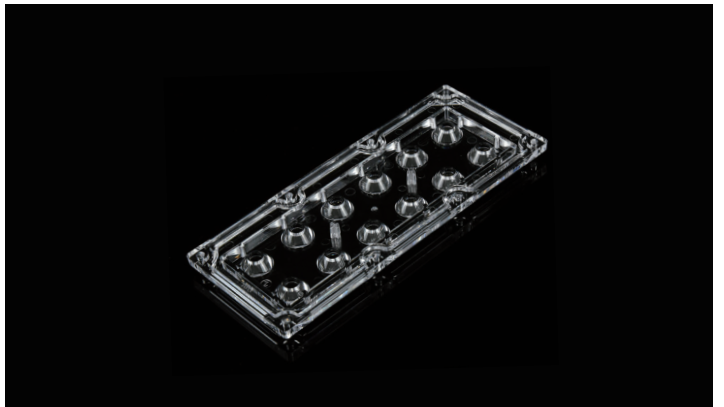


说明/CHARACTERISTIC:

1. 透镜有多种不同的配光角度。
The lens have multiple types beam angles.
2. 一体化透镜配硅胶圈。
Silicone gasket available for waterproof.
3. 兼容多种灯珠。
Compatible with various lamp beads.
4. 适用于球场灯、投光灯。
Suitable for Stadium light, flood light.
5. I LENS229升级, 光效更好, 光斑更漂亮, 兼容性更好。
I LENS229 upgrade, better light effect, more beautiful spot and better compatibility.


LED:CREE XPE2
 角度/FWHM:8°
 光效/Efficiency:90%
 峰值强度/Peakintensity:29.8CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

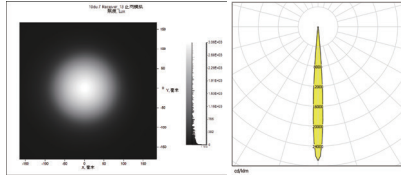


LED:CREE XD16
 角度/FWHM:15.3°
 光效/Efficiency:84%
 峰值强度/Peakintensity:7.7CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

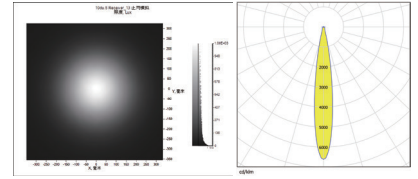


LED:CREE XPG2
 角度/FWHM:10.9°
 光效/Efficiency:90%
 峰值强度/Peakintensity:16.5CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

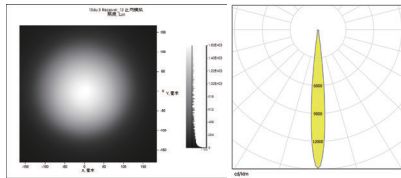


LED:LUXEON 3030 2D
 角度/FWHM:16°
 光效/Efficiency:84%
 峰值强度/Peakintensity:7.2CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

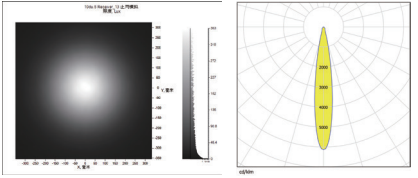


LED:CREE XML2
 角度/FWHM:16.4°
 光效/Efficiency:90%
 峰值强度/Peakintensity:7.7CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

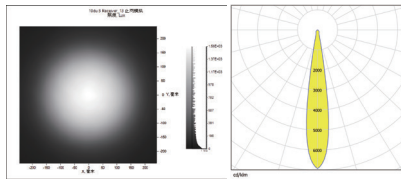


LED:LUXEON 5050
 角度/FWHM:23.6°
 光效/Efficiency:84%
 峰值强度/Peakintensity:3.6CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

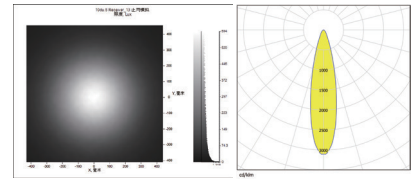


LED:CREE XPL2
 角度/FWHM:20°
 光效/Efficiency:84%
 峰值强度/Peakintensity:4.4CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

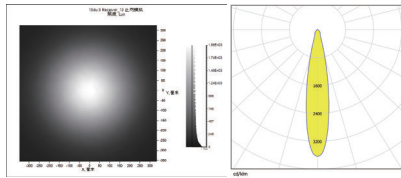


LED:SAMSUNG LH351B
 角度/FWHM:16.8°
 光效/Efficiency:84%
 峰值强度/Peakintensity:6.3CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

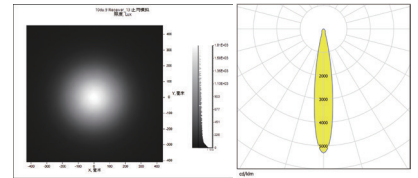


LED:CREE XPE2
 角度/FWHM:7.5°
 光效/Efficiency:96%
 峰值强度/Peakintensity:34CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

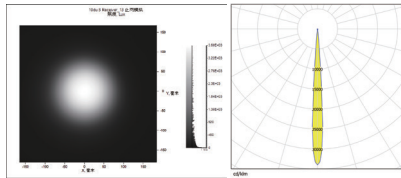


LED:CREE XD16
 角度/FWHM:15.8°
 光效/Efficiency:93%
 峰值强度/Peakintensity:7.7CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

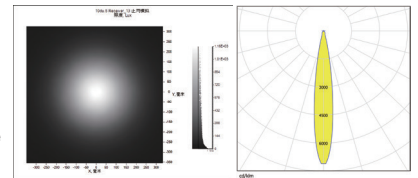


LED:CREE XPG2
 角度/FWHM:10.8°
 光效/Efficiency:96%
 峰值强度/Peakintensity:17.2CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

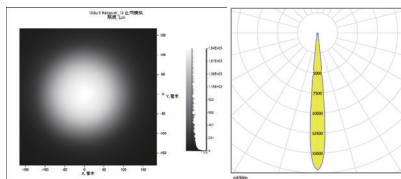


LED:LUXEON 3030 2D
 角度/FWHM:16.9°
 光效/Efficiency:93%
 峰值强度/Peakintensity:6.6CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

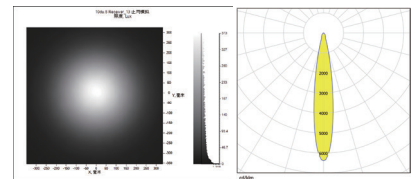


LED:CREE XML2
 角度/FWHM:16°
 光效/Efficiency:96%
 峰值强度/Peakintensity:7.7CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

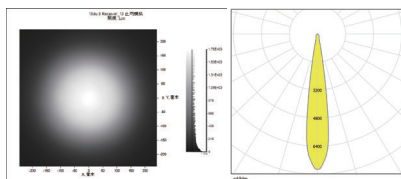


LED:LUXEON 5050
 角度/FWHM:24°
 光效/Efficiency:93%
 峰值强度/Peakintensity:3.5CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

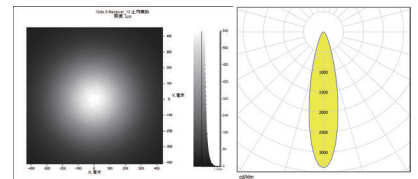


LED:CREE XPL2
 角度/FWHM:19.8°
 光效/Efficiency:93%
 峰值强度/Peakintensity:4.4CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:

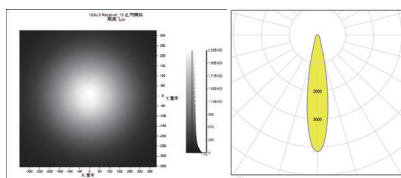


LED:SAMSUNG LH351B
 角度/FWHM:16.7°
 光效/Efficiency:93%
 峰值强度/Peakintensity:6.3CD/LM
 光学面数量/LED/each optic:12
 灯光颜色/Light colour:白色/White
 所需组件/Required components:




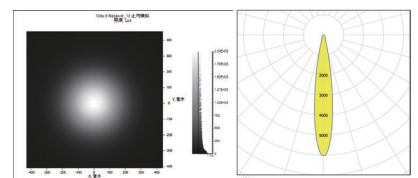


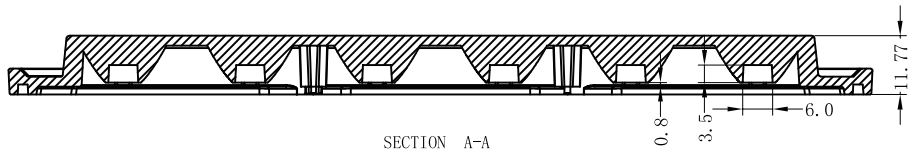

SECTION A-A

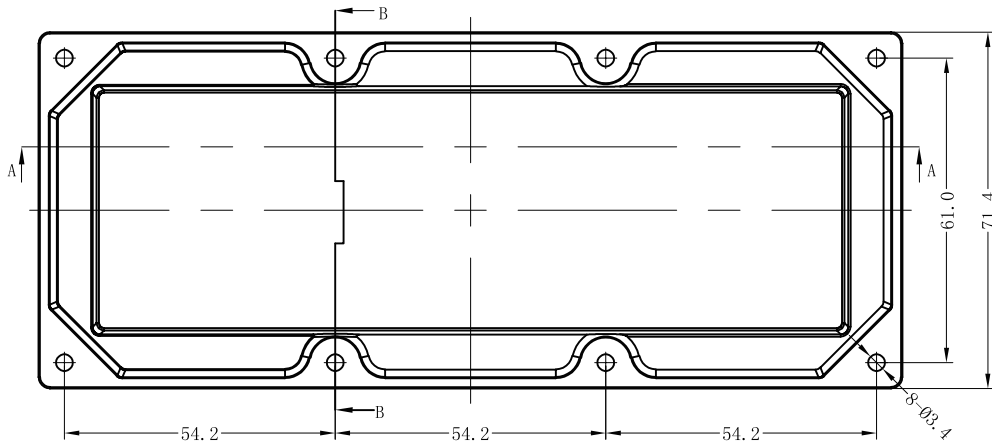

SECTION B-B

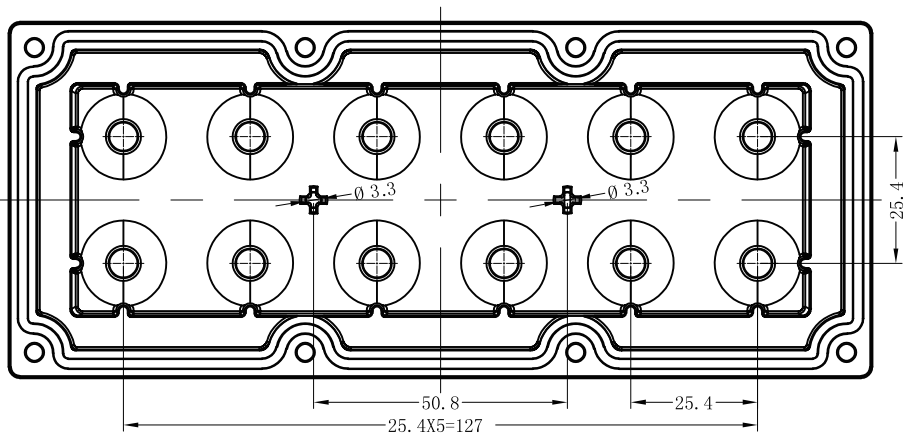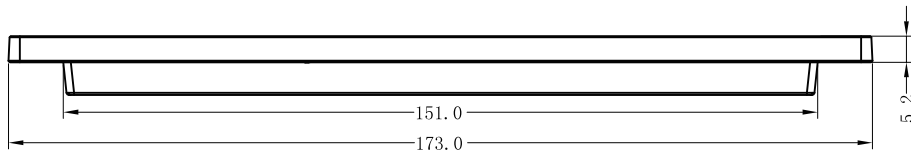

注意/NOTE:


1. 镜片表面应光滑无划痕、气泡、凹痕和黑点。

The surface of the lens should be smooth without scratches, bubbles, dents and black spots.


GENERAL TOLERANCES ISO2768-M (UNLESS STATED) 一般公差ISO 2768-M(除非另有说明)	MATERIAL 材质	PMMA or PC	DRAWING TITLE 绘图标题	ILENS796-R17371-10-12H1-NH-S
LINEAR/线性	0~5±0.05		5~10±0.1	10~30±0.15
ANGULAR/角度	0°~10°±1°		10°~50°±0.5°	50°~120°±0.3°

产品包装/PRODUCTS PACKAGING

型号/Part No.	数量/QTY
ILENS796-R17371-10-12H1-NH-S	250pcs
吸塑/Blister-380*380*20	25pcs
外盒/Cardboard box(M)	1pcs

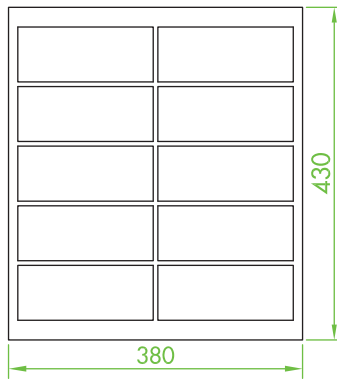


吸塑/Blister-380*380*20

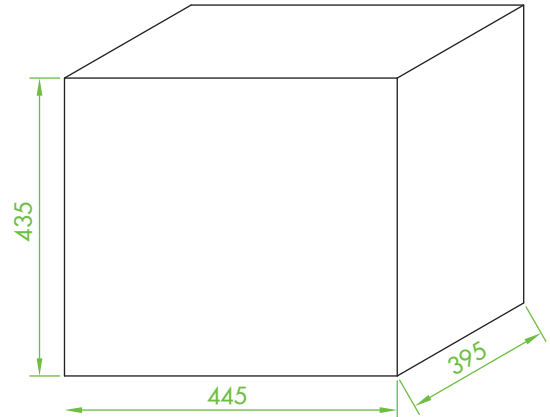

外盒/Cardboard box(M)

示意图/The schematic diagram :

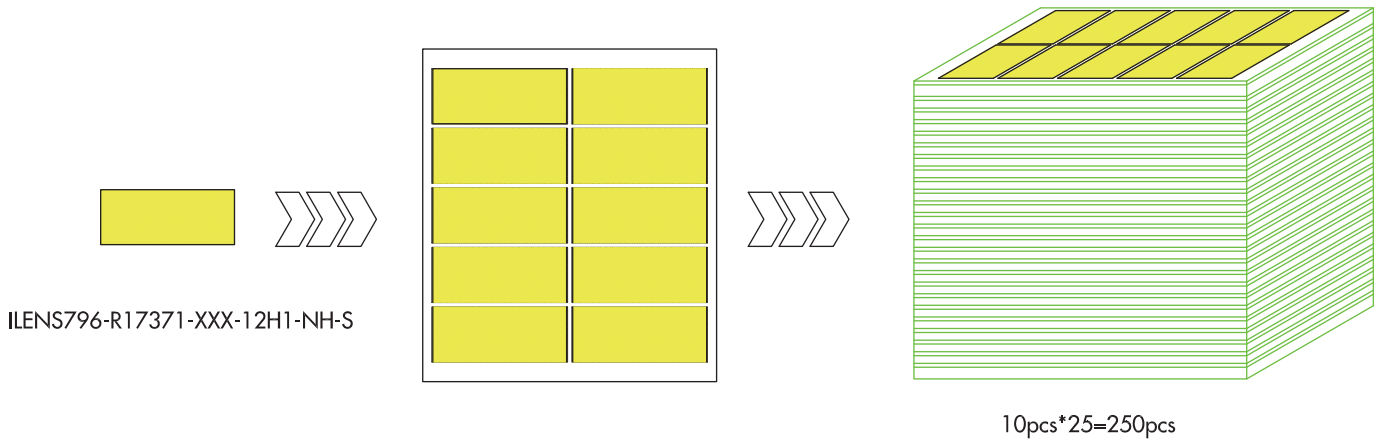

备注：防水硅胶圈是单独包装的
PS: The waterproof rubber ring is packaged separately.